5.05.510.648/0000



RAFIX 16, PCB plug-in socket



fields of application

- > Measurement-control-regulation
- > Electrical engineering
- > Mechanical and system engineering
- > Industrial robots

-25 °C

Yes

special features

> Suitable for RAFIX 16 switching elements with plug-in connection

description

Connection accessories for RAFIX 16 switching elements.

Zum Einlöten in Leiterplatten. Die Leiterplatte mit den Stecksockeln wird auf die Schaltelemente/Lampenfassungen aufgesteckt. Eine weitere Befestigung der Leiterplatte am Schaltelement ist nicht notwendig. Printanschlüsse 3,5 mm lang, für 1,3 mm Bohrung.

technical data

>	general
•	gonora

Operating temperature, min. 70 °C Operating temperature, max. Packaging unit 50 pcs. net weight 4.7 g MOQ order 50 pcs. RoHS compliant Yes

REACH compliant mounting diameters

Outside dimension, length 24 mm Outside dimension, width 22 mm Outside dimension, height 14.5 mm

> mechanical data

Terminal on the rear THT

direct links

> RAFI eCatalog


RAFI GmbH & Co. KG

5.05.510.648/0000



drawings

System drawing

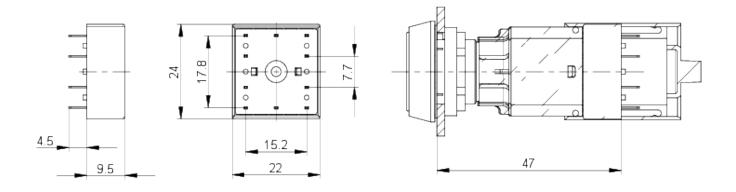

System drawing

