


Signal lamp with lamp socket, BA 15d, IP40, 30.5 mm, housing, 250 Volt, Screw/quick-connect terminal

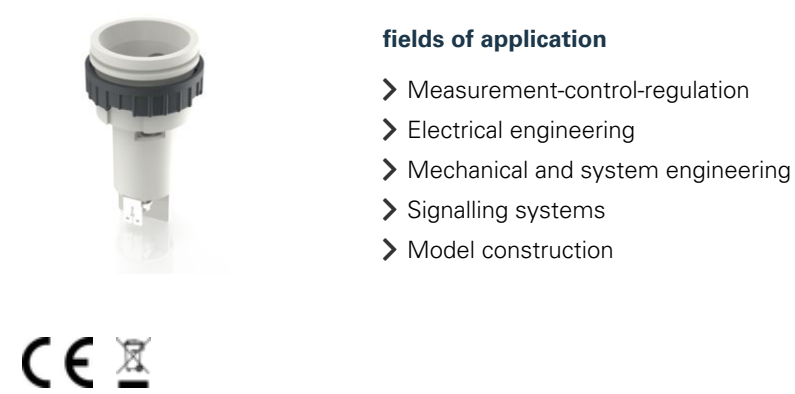

description

Signal lamps for LEDs and filament lamps with BA 15 d socket, mounting hole diameter 30.5 mm

technical data		
<b>&gt; general</b>		<b>direct links</b>  <b>&gt; RAFI eCatalog</b>
Bezel shape	round	
illuminated	Yes	
Lamp socket	BA 15d	
Packaging unit	10 pcs.	
net weight	28.1 g	
Degree of protection, front side, according to DIN EN 60529	IP40	
MOQ order	100 pcs.	
RoHS compliant	Yes	
REACH compliant	Yes	
<b>&gt; mounting diameters</b>		
Outside dimension, length	36 mm	
Outside dimension, width	36 mm	
Outside dimension, height	71 mm	
Mounting hole	30.5 mm	
Mounting depth	58 mm	
Installation height	13 mm	
Collar dimension	36 mm	
<b>&gt; mechanical data</b>		
Fixing	Threaded ring	
Terminal on the rear	Screw/quick-connect terminal	
<b>&gt; electrical data</b>		
Operating voltage of the luminous element, max.	250 V	
Operating performance of the luminous element, max.	5 W	

## drawings

---

### Mounting hole drawing

