

# RAFIX 30 FS<sup>+</sup>, signal indicator, round collar, bezel yellow



#### fields of application

- > Measurement-control-regulation
- > Electrical engineering
- > Mechanical and system engineering
- > Signalling systems
- > Vehicle construction
- > Industrial robots

#### special features

- > Signal indicator
- > Illumination with SMT LED
- > Low installation depth 15.7 mm (PCB) or 33.3 mm (QC with LED clip)
- > Connection types: printed circuit board connection (PCB) or flat quick-connect terminal (QC)
- > Degree of protection: IP 65 front side











### description

RAFIX control devices are defined at RAFI as modular elements, consisting of an actuating element, if necessary a coupling and an individual contact or lighting unit.

Actuating elements (such as pushbuttons, emergency stop actuators, etc.) have the intended tactility, reset and function only when assembled with the appropriate switching elements.

Flat signal indicator with stainless steel bezel.

### technical data

### > general

Bezel color yellow Property of bezel / mushroom translucent Front ring color stainless steel Collar shape round

-25 °C Operating temperature, min. 70 °C Operating temperature, max. -40 °C Storage temperature, min. Storage temperature, max. 80 °C illuminated Yes Packaging Box Packaging unit 10 pcs. net weight 16.6 g Degree of protection, front side, **IP65** 

according to DIN EN 60529

UL Enclosure Type Rating front

Environment resistance

direct links

> RAFI eCatalog

type 1 type 4X indoor IEC 60068-2-14 IEC 60068-2-30

RAFI GmbH & Co. KG



IEC 60068-2-33

IEC 60068-2-78

Salt-spray resistance according to

standard

IEC 60068-2-11

MOQ order 10 pcs.

RoHS compliant Yes

REACH compliant Yes

> mounting diameters

Outside dimension, length 34.5 mm Outside dimension, width 34.5 mm Outside dimension, height 20.7 mm Mounting hole 30.3 mm 15.7 mm Mounting depth Installation height 5.25 mm Grid, min. 35 x 35 mm Collar dimension ø 34,5 mm

> mechanical data


Fixing Threaded ring

Threaded ring torque, max. 1.2 Nm




### drawings

### **Dimensioned drawing**



### System drawing

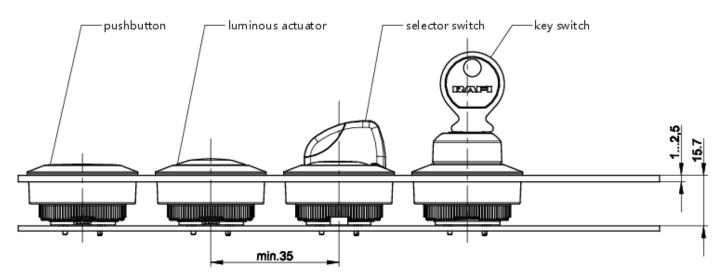



#### Mounting hole drawing

