FOR FILL AND A CONTRACT OF CONTRACTOR OF CON

New products



www.rafi.de

RAFIX 22 FS⁺

Control components of the future

The RAFIX 22 FS⁺ series is setting new standards in the world of control components. Extremely flat construction and functional aesthetic design are essential in an increas-ingly design-oriented industrial environment. The wide variety and variability of the actuators give your designer complete freedom: round or square collar types, radiant colours and homogenous illumination of the large actuat-

ing areas are among the basic features. Combined with the various front rings, they ensure that you can create a panel with a truly distinctive design. For example, a defined colour can be consistently assigned to a specific command. In addition, the large number of colour options available for the front rings enables easy customisation to suit the corporate design of different OEMs.



Fast

The fastest connection type for every application: with a printed circuit board or directly with quick-connect terminals.

- A printed circuit board is the best and fastest solution, starting with medium quantities. Moreover, PCB contact blocks can be ideally combined with displays, tactile switches and other electronics on a common printed circuit board.
- Alternatively, QC contact blocks can be easily snapped into the actuators without tools. Male quick-connect terminals are used directly for wiring in a conventional manner. The fast and inexpensive version, ideal wherever PCBs are not cost-effective.

SLIM

Now it's a snap to slim the design of your control systems thanks to the low mounting depth.

- Designs with PCB contact blocks feature a distance between the front panel and printed circuit board of only 9.2 mm; the same applies to contact blocks with silver contacts for the mains voltage. That's as slim as it gets.
- Also when fitted with QC contact blocks, RAFIX 22 FS⁺ panels are unbeatably flat. Requiring only 27 mm of space behind the front panel, they provide tremendous design scope for inspiring control panels.

+ PLUS

RAFIX 22 FS⁺ has additional benefits for you:

- Various actuators and contact block options a complete series
- · Variable thanks to round or square operating elements
- Variable thanks to gold contacts from 5 V or silver contacts up to 250 V
- Short-travel adapter for short-travel actuation (1 mm switching travel) with perceptible key click
- · Variable design thanks to various front ring colours
- Variable illumination, compatible with 3 mm THT LEDs or SMT LEDs



CONTROL COMPONENTS RAFIX 22 FS* - ACTUATORS

RAFIX 22 FS⁺ Pushbuttons FLEXLAB



The RAFIX 22 FS⁺ FLEXLAB pushbutton allows individual control component labeling. A DIN A4 label sheet with pre-cut labels which fits in customary office laser printers is available for this option. After the legend inserts are printed, they be detached from the sheet and inserted into the colored






Technical Data

lens using the fine stop tabs.

→

→	General information	
	Form of lens	flat lens
	Color of lens	see order block
	Color of front ring	see order block
	Form of collar	see order block
→	Dimensions	
	Dimensions of collar	see order block
	Overall height	9.85 mm
	Mounting depth	PCB 9.2 mm, QC 27 mm
	Mounting hole	22.3 mm
	Key grid	30 x 30 mm
→	Mechanical design	
	Mounting	ring nut
	Contact function	see order block
	Illuminability	yes
	Torque for nut ring	1.2 Nm
→	Mechanical characteristics	
	Operating travel	4 mm
	Robustness max.	100 N
→	Other specifications	
	Ambient temp. operating min.	-25 °C
	Ambient temp. operating max.	+70 °C
	Storage temperature min.	-40 °C
	Storage temperature max.	+80 °C
	Operating life	1,000,000 momentary / 500,000 latching
	B10	1,300,000 momentary / 650,000 latching
	Degree of protection from front side	IP65 (DIN EN 60529)
	Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
	Salt spray	IEC 600 68-2-11
	ROHS compliant	yes
	REACH compliant	yes




Approvals



RAFIX 22 FS⁺ - ACTUATORS

Accessories RAFIX 22 FS⁺ - Pushbuttons FLEXLAB

Description	Photo	Order no.	Additional acces sories see page
RAFIX FS - Contact block PCB gold, Universal	٢	-	-
RAFIX FS - Contact block PCB gold, Universal, with light conductor	٢	-	-
RAFIX FS - Contact block PCB silver, Universal	٢	-	-
RAFIX FS - Contact block PCB silver, Universal, with light conductor	Ś	-	-
RAFIX FS - Contact block QC gold, Universal, with light conductor		-	-
RAFIX FS - Contact block QC silver, Universal, with light conductor	6	-	-
Fixing spanner for ring nut		5.05.800.062/0000	-

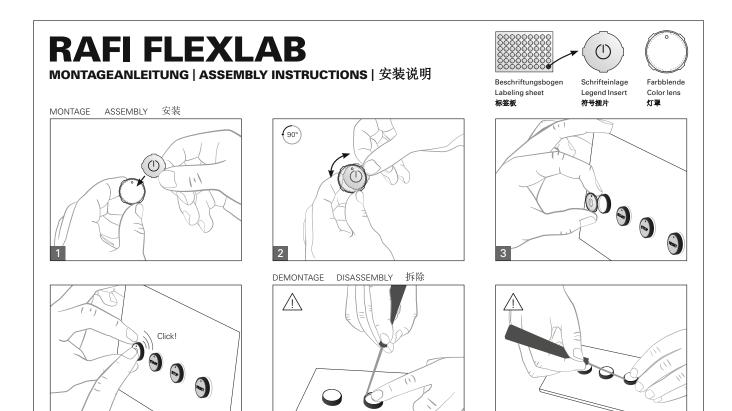


2

4

CONTROL COMPONENT RAFIX 22 FS⁺ -ΔC

RAFIX 22 FS⁺ Pushbutton FLEXLAB, round collar Technical data see page 3

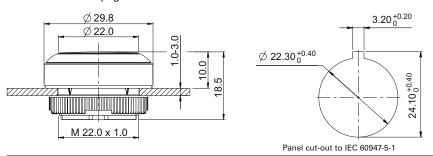




→	Order no.	momentary	Order n	o. latching
	Plastic front ring	Metallized front ring	Plastic front ring	Metallized front ring
	1.30.270.901/22xx	1.30.270.921/2200	1.30.270.911/22xx	1.30.270.931/2200

xx = Front ring color: black = 01, red = 03, yellow = 04, green = 05, blue = 06, slate gray = 07, silver gray = 08

Accessoires:

Colored lens for RAFIX FS⁺ Pushbuttons FLEXLAB, colorless: 5.49.263.062/1000 Colored lens for RAFIX FS⁺ Pushbuttons FLEXLAB, red: 5.49.263.062/1300 Colored lens for RAFIX FS⁺ Pushbuttons FLEXLAB, yellow: 5.49.263.062/1400 Colored lens for RAFIX FS⁺ Pushbuttons FLEXLAB, green: 5.49.263.062/1500 Colored lens for RAFIX FS⁺ Pushbuttons FLEXLAB, blue: 5.49.263.062/1600 DIN A4 label sheet with 6x9 lenses in total utility: 5.70.800.200/0000

RAFIX 22 FS⁺ **Pushbutton FLEXLAB**, square collar

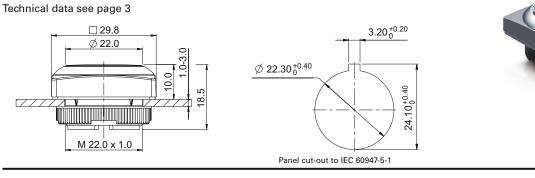



•	Form of collar	Order no.	momentary	Order no	o. latching
		Plastic front ring	Metallized front ring	Plastic front ring	Metallized front ring
	square	1.30.270.951/22xx	1.30.270.971/2200	1.30.270.961/22xx	1.30.270.981/2200

xx = Front ring color: black = 01, red = 03, yellow = 04, green = 05, blue = 06, slate gray = 07, silver gray = 08

Accessoires:

Colored lens for RAFIX FS⁺ Pushbuttons FLEXLAB, colorless: 5.49.263.062/1000 Colored lens for RAFIX FS⁺ Pushbuttons FLEXLAB, red: 5.49.263.062/1300 Colored lens for RAFIX FS⁺ Pushbuttons FLEXLAB, yellow: 5.49.263.062/1400 Colored lens for RAFIX FS⁺ Pushbuttons FLEXLAB, green: 5.49.263.062/1500 Colored lens for RAFIX FS⁺ Pushbuttons FLEXLAB, blue: 5.49.263.062/1600 DIN A4 label sheet with 6x9 lenses in total utility: 5.70.800.200/0000




RAFIX 22 FS⁺ Keylock switches compact

→ The locking systems we use are created according to DIN EN 1303 by leading lock manufacturers. They are open, mechanical systems that require occasional maintenance by the operator depending on the ambient conditions.

Technical Data

→	General information	
	Color of front ring	see order block
	Form of collar	see order block
→	Dimensions	
	Dimensions of collar	see order block
	Overall height	44.1 mm
	Mounting depth	PCB 9.2 mm, QC 27 mm
	Mounting hole	22.3 mm
	Key grid	30 x 30 mm
→	Mechanical design	
	Mounting	ring nut
	Contact function	see order block
	Illuminability	see order block
	Wafers	5
	Lock type	001
	Main key	on request
	Rotating angle	see order block
	Key removal position	see order block
	Torque for nut ring	1.2 Nm
→	Mechanical characteristics	
	Torque max.	1.3 Nm
→	Other specifications	
	Operating life	300,000 momentary / 50,000 latching /
		30,000 with key removal
	B10	400,000 momentary / 65,000 latching /
		40,000 with key removal
	Degree of protection from front side	IP65 (DIN EN 60529)
	Ambient temp. operating min.	-25 °C
	Ambient temp. operating max.	+70 °C
	Storage temperature min.	-40 °C
	Storage temperature max.	+80 °C
	Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
	ESD-strength lock / contact	15 kV
	ESD-strength key / front panel	15 kV
	Salt spray	IEC 600 68-2-11
	ROHS compliant	yes
	REACH compliant	yes





Approvals




RAFIX 22 FS⁺ - ACTUATORS


- Table (continued) -

Description	Photo	Order no.	Additional acces sories see page
RAFIX FS - Contact block PCB silver, Universal	٢	-	-
RAFIX FS - Contact block QC gold, Universal, with light conductor		-	-
RAFIX FS - Contact block QC silver, Universal, with light conductor	٢	-	-
Fixing spanner for ring nut		5.05.800.062/0000	-
RAFIX FS - Protective cap for keylock switch		5.55.105.454/0111	-
Spare key, for single action, e.g. 1 x 90° (delivery content 1 key)	N.	5.58.018.001/0000	-

RAFIX 22 FS⁺ Keylock switch compact, round collar

Technical data see page 6







Contact function	Rotating angle		Key removal position	Ord	er no.
				Plastic front ring	Metallized front ring
momentary	1 x 40°	0	0	1.30.275.001/xxxx	1.30.275.002/0000
momentary	2 x 40°		0	1.30.275.101/xxxx	1.30.275.102/0000
latching	1 x 90°, L shape	0	0+1	1.30.275.221/xxxx	1.30.275.222/0000
latching	1 x 90°, V shape	0 1	0+1	1.30.275.321/xxxx	1.30.275.322/0000
latching 1 x 90° and momentary 1 x 40°	1 x 90° and 1 x 40°		0	1.30.275.501/xxxx	1.30.275.502/0000

xxxx = Front ring color: black = 0100, slate grey = 0700, silver grey = 0800


Other lock variants available on request. Included: 2 keys.


RAFIX 22 FS⁺ - ACTUATORS



RAFIX 22 FS⁺ Keylock switch compact, square collar

Technical data see page 6





Contact function	Rotating angle		Key removal position	Ord	er no.
				Plastic front ring	Metallized front ring
momentary	1 x 40°	°	0	1.30.275.051/xxxx	1.30.275.052/0000
momentary	2 x 40°		0	1.30.275.151/xxxx	1.30.275.152/0000
latching	1 x 90°, L shape	0	0+1	1.30.275.271/xxxx	1.30.275.272/0000
latching	1 x 90°, V shape	0 1	0+1	1.30.275.371/xxxx	1.30.275.372/0000
latching 1 x 90° and momentary 1 x 40°	1 x 90° and 1 x 40°		0	1.30.275.551/xxxx	1.30.275.552/0000

xxxx = Front ring color: black = 0100, slate grey = 0700, silver grey = 0800

Other lock variants available on request. Included: 2 keys.

RAFIX 22 FS⁺ Emergency stop pushbuttons compact

→ The emergency stop pushbuttons compact comply with IEC 60 204, IEC 60 073, IEC 60 947 and VDE 0113 Part 1.

They are designed dupe-proof according to EN 418 with a positive mechanical movement sequence. A certain operating force must be exerted at the action point in order to prevent inadvertent operation. The pushbutton latches when pressed.

The special shape of the actuator prevents the emergency stop pushbutton from being blocked. This means that the emergency stop process - once initiated - cannot be impeded by any jamming objects.


Only use with E-stop contact blocks.


Original manual see chapter 6, RAFI catalog "Electromechanical Components".

Technical Data

→	General information	
	Form of lens	conical mushroom form
	Color of lens	red
	Form of collar	round
→	Dimensions	
	Mushroom Diameter	30 mm
	Overall height	see order block
	Mounting depth	PCB 9.2 mm, QC 27 mm
	Mounting hole	22.3 mm
	Diameter of collar	see order block
→	Mechanical design	
	Mounting	ring nut
	Contact function	latching
	Illuminability	see order block
	Reset	see order block
	Torque for nut ring	1.2 Nm
→	Mechanical characteristics	
	Robustness max.	100 N
→	Other specifications	
	Ambient temp. operating min.	-25 °C
	Ambient temp. operating max.	+70 °C
	Robustness	acc. to IEC 600 68-2-3 und 2-30
	Storage temperature min.	-40 °C
	Storage temperature max.	+80 °C
	Operating life (operations)	50,000
	B10	65,000
	Degree of protection from front side	IP65 (DIN EN 60529)
	Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
	Salt spray	IEC 600 68-2-11









CONTROL COMPONENTS RAFIX 22 FS⁺ - ACTUATORS


Accessories RAFIX 22 FS⁺ - Emergency stop pushbuttons compact


I	Description	Photo	Order no.	Additional acces- sories see page
	Emergency stop label, Ø 22.3 mm	and the second second	-	-
	RAFIX FS - Contact block PCB gold, E-Stop	٢	-	-
	RAFIX FS - Contact block PCB gold, E-Stop, with light conductor		-	-
	RAFIX FS - Contact block PCB silver, E-Stop	٢	-	-
	RAFIX FS - Contact block PCB silver, E-Stop, with light conductor	٢	-	-
	RAFIX FS - Contact block QC gold, E-Stop, with light conductor		-	-
	RAFIX FS - Contact block QC silver, E-Stop, with light conductor		-	-
	Fixing spanner for ring nut		5.05.800.062/0000	-



RAFIX 22 FS⁺ **Emergency stop pushbutton** compact, reset by rotation

Technical data see page 9





→	Reset	Illuminability	Degree of protection from front side	Order no.
	by rotating	yes	IP65 (DIN EN 60529)	1.30.273.311/2300

Only use with E-stop contact blocks


RAFIX FS - SHORT-TRAVEL ADAPTER

RAFIX FS Short-travel adapters

The short-travel adapter can easily be inserted into a RAFIX 22 FS⁺ series → pushbutton. The tactile properties of the tactile switch become noticeable when the pushbutton is pressed. In addition the small footprint of the MICON 5 enables the placement of diverse LEDs, allowing several light functions.

Technical Data

→	General information	
	On exerting life	250.000 operations on MICON 5
	Operating life	1.14.002.101/0000
→	Other specifications	
→	Other specifications ROHS compliant	yes
→		yes yes

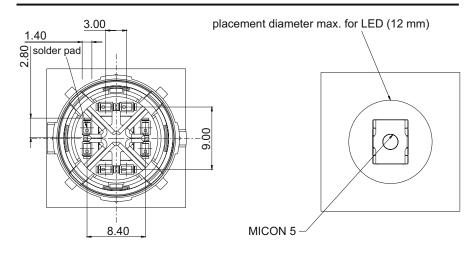

RAFIX FS Short-travel adapter



→	Description	Order no.
	RAFIX FS - Short-travel adapter on MICON 5	5.05.511.917/0000







The information in this brochure only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which my change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they expressly agreed upon at the time of the

conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only.

All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

RAFI GmbH & Co. KG

Ravensburger Str. 128–134, D-88276 Berg/Ravensburg Tel.: +49 751 89-0, Fax: +49 751 89-1300 www.rafi.de, info@rafi.de

